


DIAPHRAGM DELUGE VALVE REMOTE RESET

MODEL AG 400-R REMOTE RESET (ON/OFF)

Electro - Pneumatic Actuation
(Ductile Iron, Cast Steel & Nickel Aluminum Bronze)

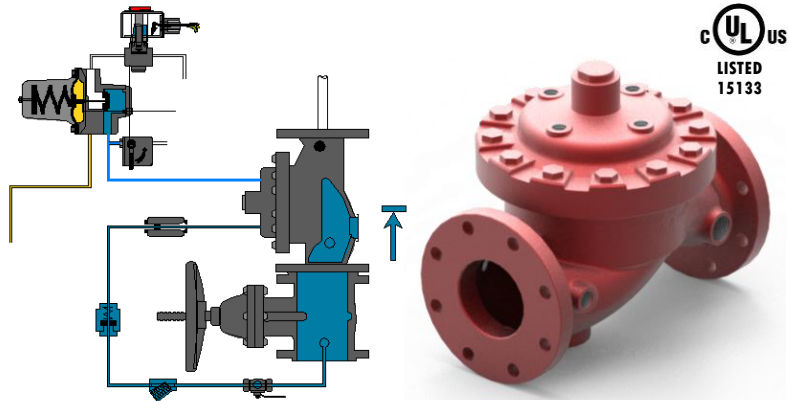

PRODUCT DESCRIPTION

Deluge Valve is known as a system control valve in a deluge system, used for fast application of water in a spray system. Deluge valve protects areas such as power transformer installation, storage tank, conveyor protection and other industrial application etc. With the addition of foaming agent deluge valve can be used to protect aircraft hangar and inflammable liquid fire.

TECHNICAL DATA


Model	AG 400-R
Materials	D: Ductile Iron ASTM A536 S: Cast Steel ASTM A216 WCB N: Nickel Aluminum Bronze BS1400 Gr AB2
Nominal size	DN50 (2"), DN80 (3"), DN100 (4"), DN150 (6") & DN200 (8")
Service pressure	1,4 to 17,5 Bar (20 to 250 psi)
Threaded opening	BSPT
Installation position	Vertical or Horizontal mounting
Factory hydrostatic test pressure	35 Kg/sq.cm. (500 psi)
Flange connection	ANSI B 16.5
Service	Without removal from line
Trim	Galvanized tubing and fittings and brass accessories Stainless Steel (SS-316) tubing and fittings and brass accessories Stainless Steel (SS-316) tubing, fittings and accessories Monel and Nickel Aluminum Bronze tubing, fittings and accessories
Operation	Diaphragm operated with rubber to metal drip-tight positive sealing
Net weight without trim	2" DN50 - 32 Kg 3" DN80 - 35 Kg 4" DN100 - 50 Kg 6" DN150 - 79 Kg 8" DN200 - 153 Kg
Finish	Internal and external surfaces epoxy coated for extra protection Red RAL 3000

OPERATION: MODEL AG 400-R ELECTRO PNEUMATIC ACTUATION

The model AG 400-R from AG Fire Sprinkler is suitable for systems that include electric fire detection and piping systems with a wide variety of open nozzles. Being pneumatically controlled, the model AG 400-R is recommended for those cases, such as seawater installations, where it is advantageous to keep the solenoid (1) dry.


In the SET position the line-pressure, which is supplied to the main valve's control chamber (2) through the priming line (3), a check valve (4), and a restriction (5), is trapped by the check valve, by a closed pneumatic actuator (6) and a closed manual emergency release (7). The trapped pressure holds the main valve's diaphragm and plug against the valve seat, sealing it drip-tight and keeping the system piping dry. The pneumatic actuator (6) is held closed by the dry pilot line pneumatic pressure keeping dry the solenoid (1).

Under FIRE or TEST conditions, a dry pilot line pneumatic pressure drop, or an electric signal that triggers the Solenoid, opens the pneumatic actuator (6) causing water to exit due to the restriction faster than it can be supplied. Pressure is then released from the main valve's control chamber through the opened pneumatic actuator (6) or the manual emergency release, allowing the main valve to fully open, and water to flow into the system piping and to the alarm device (if mounted).

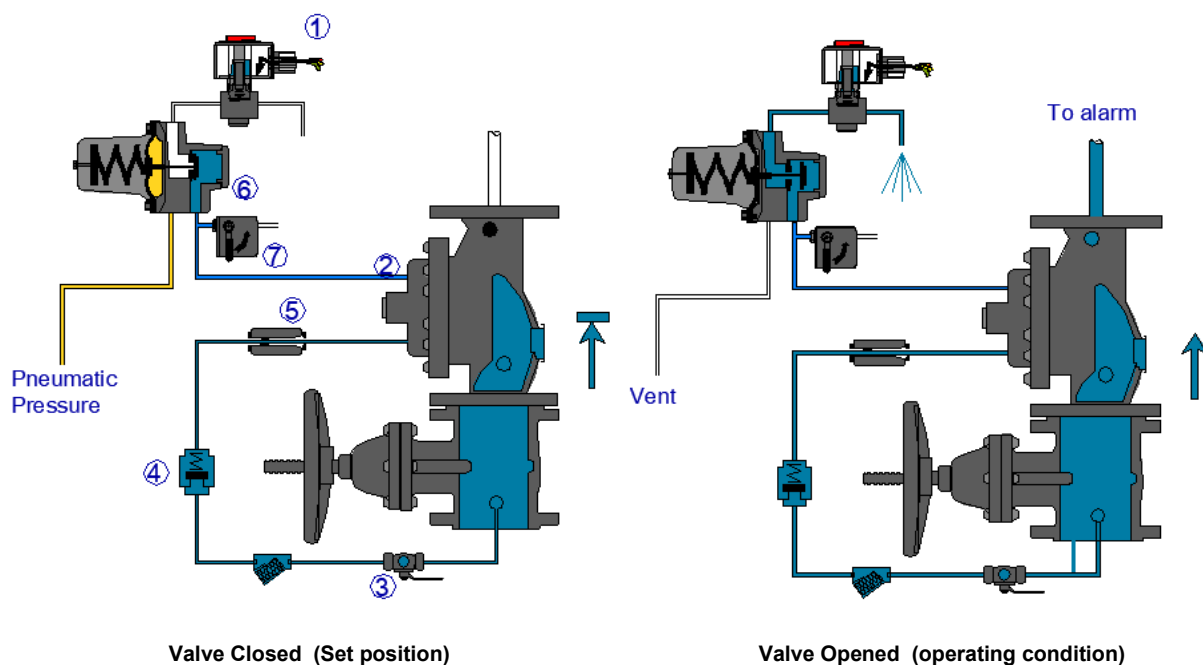


DIMENSIONS

VALVE NOMINAL SIZE	A (mm)	B (mm)
50 DN (2")	320	232
80 DN (3")	372	232
100 DN (4")	412	245
150 DN (6")	462	282
200 DN (8")	552	332

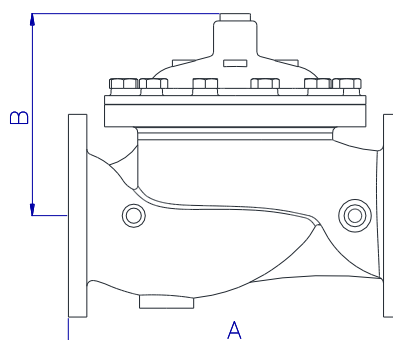

MATERIALS

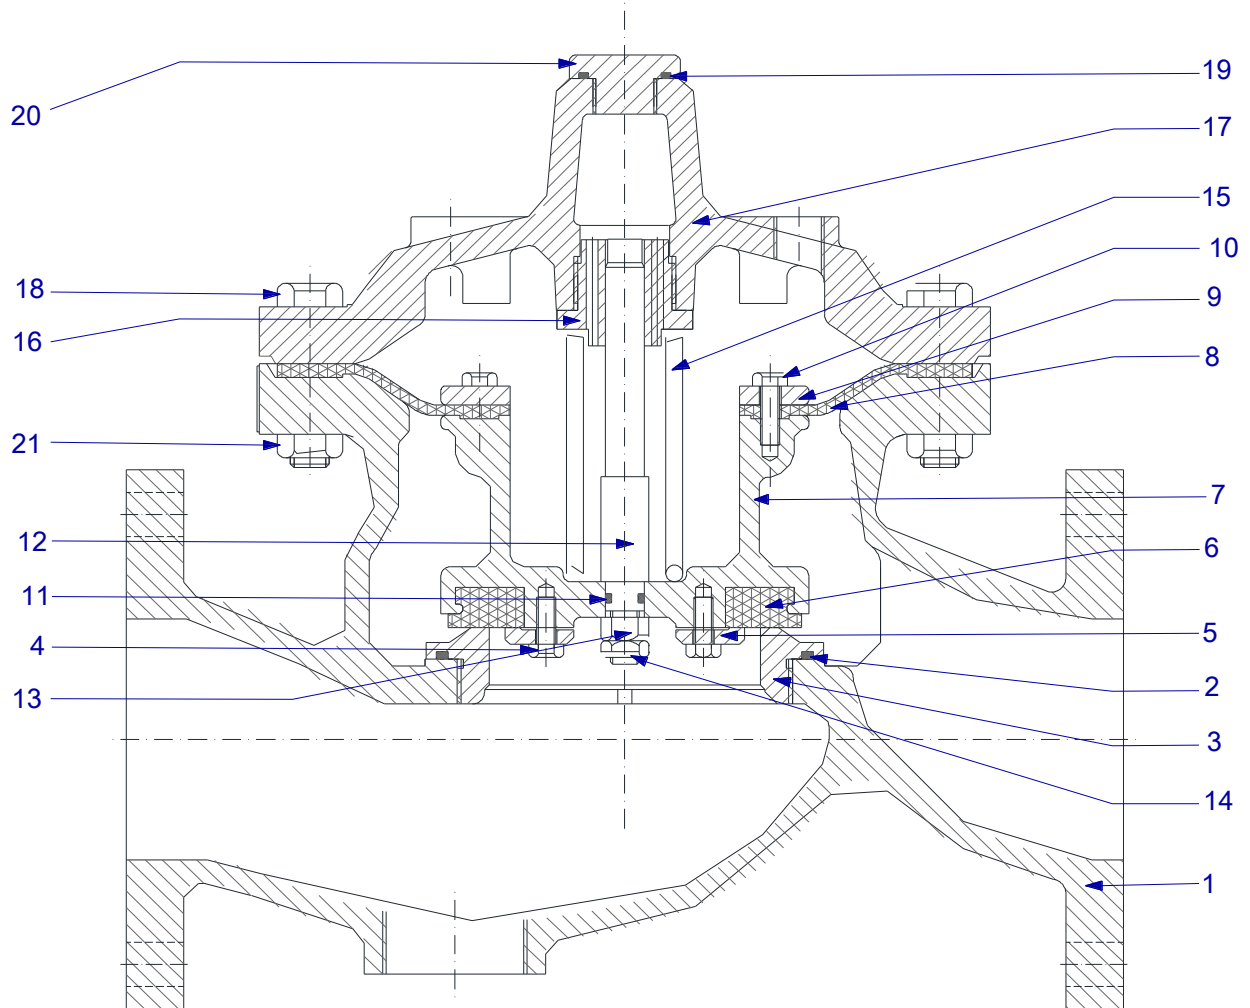


NA - PART REPLACEMENT NOT AVAILABLE

* Stainless Steel is standard supply Bronze is optional supply.

** Ductile Iron is standard supply Bronze/Stainless Steel is optional supply.

D: DUCTILE IRON ASTM A 536-77 GRADE 65-45-12					S: CAST STEEL ASTM A216-WBC					N: NICKEL ALUMINIUM BRONZE BS1400 Gr AB2				
N	DESCRIPT ION	QUANTITY			MATERIAL	PART NUMBER				MATERIAL	PART NUMBER			
		8"	6/4"	3/2"		8"	6"	4"	3/2"		8"	6"	4"	3/2"
1	Housing	1	1	1	Ductile iron	NA	NA	NA	NA	Cast Steel	NA	NA	NA	NA
2	"O" ring	1	1	1	Neoprene rubber	8561	9783	9784	9791	Neoprene rubber	8561	9783	9784	9791
3	Seat	1	1	1	Stainless Steel*	4025	3993	4003	4017	Stainless Steel*	4025	3993	4003	4017
4	Bolt	8	4	-	Stainless Steel	9151	9112	9112	-	Stainless Steel*	9151	9112	9112	-
5	Rubber clamp	1	1	1	Ductile iron**	4026	3994	4004	4018	Ductile iron**	4026	3994	4004	4018
6	Rubber seat	1	1	1	Neoprene rubber	4027	4000	4005	4023	Neoprene rubber	4027	4000	4005	4023
7	Clapper	1	1	1	Ductile iron**	4034	3990	4011	4041	Ductile iron**	4034	3990	4011	4041
8	Diaphragm	1	1	1	Neoprene rubber	4035	2427	2507	2786	Neoprene rubber	4035	2427	2507	2786
9	Clamp ring	1	1	1	Ductile iron**	4030	2424	2504	2788	Ductile iron**	4030	2424	2504	2788
10	Bolt	12	8	8	Stainless Steel	8806	9151	9187	9187	Stainless Steel	8806	9151	9187	9187
11	"O" ring	1	1	1	Neoprene rubber	9986	9986	9986	9986	Neoprene rubber	9986	9986	9986	9986
12	Spindle	1	1	1	Stainless Steel	4029	3996	4007	4020	Stainless Steel	4029	3996	4007	4020
13	nut	1	1	1	Stainless Steel	9185	8838	8838	9185	Stainless Steel	9185	8838	8838	9185
14	Lock nut	1	1	1	Stainless Steel	9186	9184	9184	9186	Stainless Steel	9186	9184	9184	9186
15	Spring	1	1	1	Stainless Steel	2980	2979	2978	2977	Stainless Steel	2980	2979	2978	2977
16	Adaptor	1	1	1	Brass	4033	3998	4010	3983	Brass	4033	3998	4010	3983
17	Cover	1	1	1	Ductile iron	NA	NA	NA	NA	Cast Steel	NA	NA	NA	NA
18	Bolt	16	12	12	Carbon Steel	9008	9049	9051	8692	Carbon Steel	9008	9049	9051	8692
19	"O" ring	1	1	1	Neoprene rubber	9982	9982	9982	9982	Neoprene rubber	9982	9982	9982	9982
20	Plug	1	1	1	Steel Plated	2514	2514	2514	2514	Steel Plated	2514	2514	2514	2514
21	Allen bolt	6	-	-	Stainless Steel	8843	-	-	-	Stainless Steel	8843	-	-	-

FRICITION LOSS

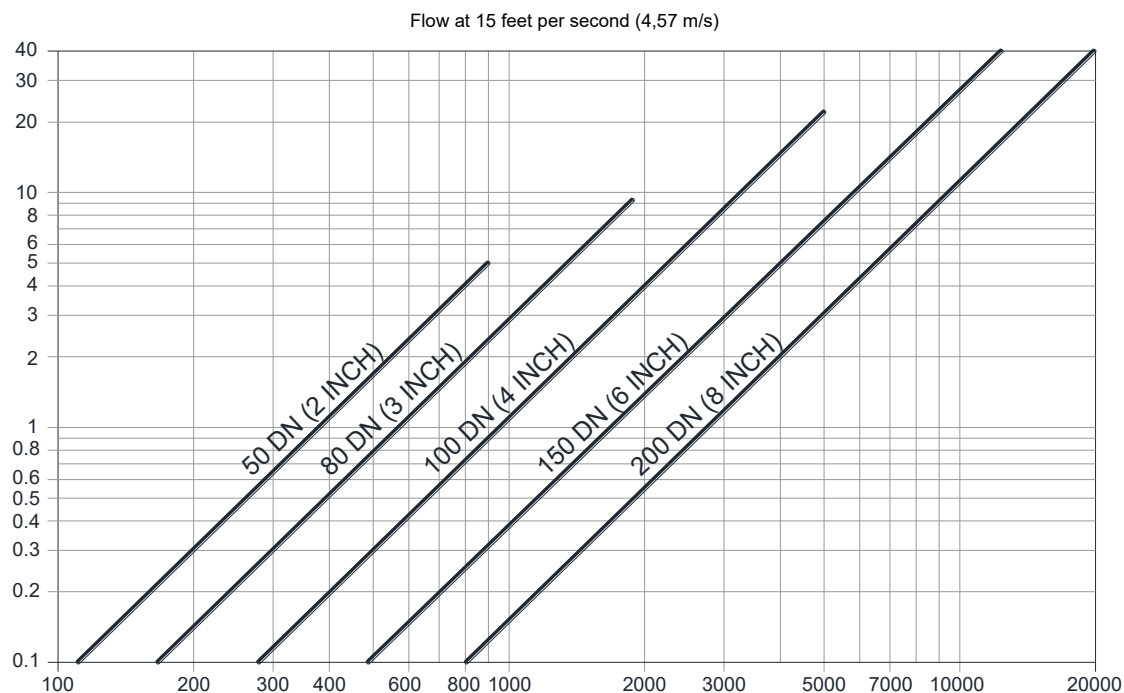

- * 2.3 PSI Pressure loss @ 15 feet per second (4,57 m/s) velocity having flow of 594 lpm thru DN 50 AG 400-R
- * 4.7 PSI Pressure loss @ 15 feet per second (4,57 m/s) velocity having flow of 1308 lpm thru DN 80 AG 400-R
- * 4.7 PSI Pressure loss @ 15 feet per second (4,57 m/s) velocity having flow of 2255 lpm thru DN 100 AG 400-R
- * 7.5 PSI Pressure loss @ 15 feet per second (4,57 m/s) velocity having flow of 5117 lpm thru DN 150 AG 400-R
- * 8.4 PSI Pressure loss @ 15 feet per second (4,57 m/s) velocity having flow of 8854 lpm thru DN 200 AG 400-R

ORDERING INFORMATION

ASSEMBLED VALVES					
SIZE	VALVE TYPE				
	DUCTILE IRON		STEEL		NICKEL – ALUMINUM – BRONZE
	TRIM TYPE		TRIM TYPE		TRIM TYPE
	GALVANIZED STEEL (175psi)	STAINLESS STEEL AISI316 (250psi)	GALVANIZED STEEL (175psi)	STAINLESS STEEL AISI316 (250psi)	MONEL (250psi)
2" DN50	PDAG400R050EN0	PDAG400R050EN1	PDAG400R050EN2	PDAG400R050EN3	PDAG400R050EN4
3" DN80	PDAG400R080EN0	PDAG400R080EN1	PDAG400R080EN2	PDAG400R080EN3	PDAG400R080EN4
4" DN100	PDAG400R100EN0	PDAG400R100EN1	PDAG400R100EN2	PDAG400R100EN3	PDAG400R100EN4
6" DN150	PDAG400R150EN0	PDAG400R150EN1	PDAG400R150EN2	PDAG400R150EN3	PDAG400R150EN4
8" DN200	PDAG400R200EN0	PDAG400R200EN1	PDAG400R200EN2	PDAG400R200EN3	PDAG400R200EN4

SEPARATED COMPONENTS			
SIZE	VALVE		
	DUCTILE IRON	STEEL	NICKEL – ALUMINUM – BRONZE
2" DN50	AG400D050U	AG400S050U	AG400N050U
3" DN80	AG400D080U	AG400S080U	AG400N080U
4" DN100	AG400D100U	AG400S100U	AG400N100U
6" DN150	AG400D150U	AG400S150U	AG400N150U
8" DN200	AG400D200U	AG400S200U	AG400N200U

SEPARATED COMPONENTS						
SIZE	TRIM TYPE					
	GALVANIZED STEEL (175psi)		STAINLESS STEEL AISI316 (250psi)		MONEL (250psi)	
	SPARED	PREMOUNTED	SPARED	PREMOUNTED	SPARED	PREMOUNTED
2" DN50	TRDR050080EN0	TRDR050080EN0P	TRDR050080EN3	TRDR050080EN3P	TRDR050080EN4	TRDR050080EN4P
3" DN80	TRDR050080EN0	TRDR050080EN0P	TRDR050080EN3	TRDR050080EN3P	TRDR050080EN4	TRDR050080EN4P
4" DN100	TRDR100200EN0	TRDR100200EN0P	TRDR100200EN3	TRDR100200EN3P	TRDR100200EN4	TRDR100200EN4P
6" DN150	TRDR100200EN0	TRDR100200EN0P	TRDR100200EN3	TRDR100200EN3P	TRDR100200EN4	TRDR100200EN4P
8" DN200	TRDR100200EN0	TRDR100200EN0P	TRDR100200EN3	TRDR100200EN3P	TRDR100200EN4	TRDR100200EN4P

Specify:

Model number	
Type (Actuation)	
Quantity	
Material	
Size of valve	
Flange specification	
Trim materials	
Thread Size	